


STANDARD SECTION

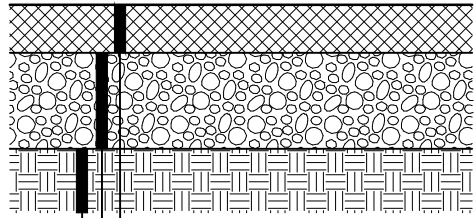


— 2½”–4” ASPHALT PAVEMENT
PER SPECIFICATIONS

— 6” MIN. BASE COURSE
MATERIAL COMPACTED TO
95% DENSITY

— EXISTING COMPACTED
SUBGRADE

OVERLAY SECTION

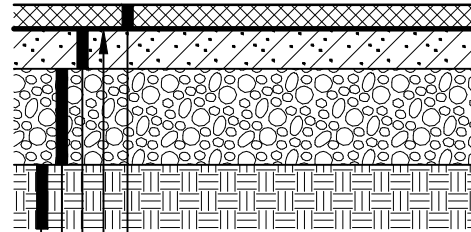

— 1½” MIN. ASPHALT PAVEMENT
OVERLAY

— OPTIONAL PETRO-MAT LAYER

— SMOOTH EXISTING ACP LAYER

— EXISTING COMPACTED BASE
COURSE MATERIAL

— EXISTING COMPACTED SUBGRADE

NOTES:

1. ASPHALT MIX SHALL BE HMA CLASS ½” PG 58H-22 WEARING COURSE OR APPROVED EQUAL WITH INSTALLATION TEMPERATURES RANGING BETWEEN 275°–300°F.
2. MINIMUM ASPHALT THICKNESS FOR PEDESTRIAN ONLY PATHWAYS SHALL BE 2½”. MINIMUM ASPHALT THICKNESS FOR PARKING LOTS, DRIVEWAYS AND PATHWAYS THAT ACCOMMODATE VEHICULAR TRAFFIC SHALL BE 4”.
3. BASE COURSE MATERIAL SHALL MEET WSDOT 2-09.3(1)E STANDARDS.
4. ALL SAW CUTS MADE FOR REPAIRS/PATCHING SHALL BE VERTICAL AND IN STRAIGHT LINES. TACK ASPHALT FACES OF SAW CUTS AND SEAL ALL JOINTS WITH PG 64-22 OIL OR APPROVED EQUAL.



City of
Bellevue

TITLE:

TYPICAL ASPHALT PAVEMENT SECTIONS

DRAWING #:	PK-HS-01
SCALE:	N.T.S.
REVISION DATE:	08-2022
DEPARTMENT:	PARKS